



Acer Aspire 7736Z-4809 Back Panel Removal

Removing the back panel of the laptop is required in most component replacement.

Written By: Pnithan Jantarakolica



INTRODUCTION

Removing the back panel of the laptop expose the laptop to sensitive electronic components. Please be careful when you follow these procedures.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Acer Aspire 7736Z-4809 Repair Preparation



- Unplug and power off the laptop.
- ⓘ If the battery is still connected to the laptop, remove the battery.

Step 2




- Flip over the laptop so that the back panel of the laptop is facing up.

Step 3 — Back Panel




- Use the Phillips #1 screwdriver to remove the eight 6.5 mm Phillips #1 screws.
- ⓘ Only the four screws in the center are removable, the four along the edges are held in by rivets but can be loosened.

Step 4

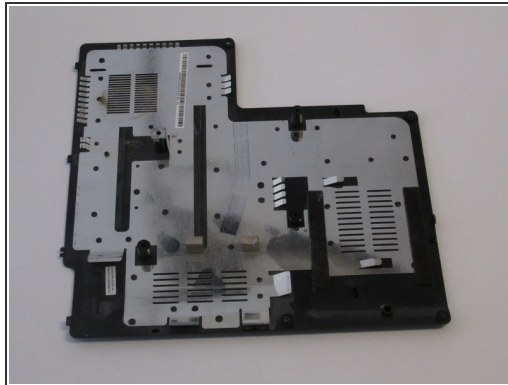

- Remove the back panel of the laptop.

Step 5

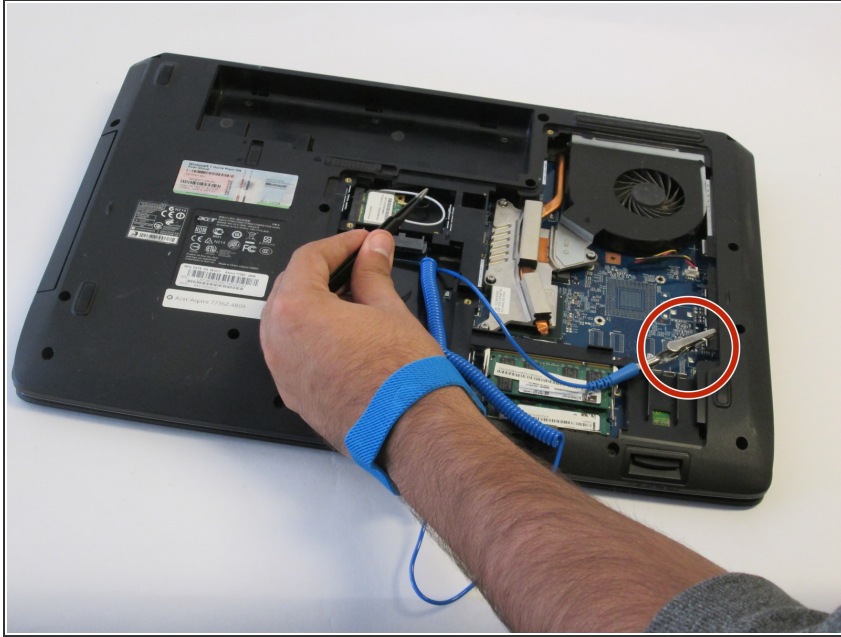

- Connect a grounding cord to a metal interface on the laptop.
- ⚠ Ground the laptop to prevent static electricity from damaging the electrical components inside the laptop.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-04 11:47:41 AM.